


1504 Alice Flutter Knickers

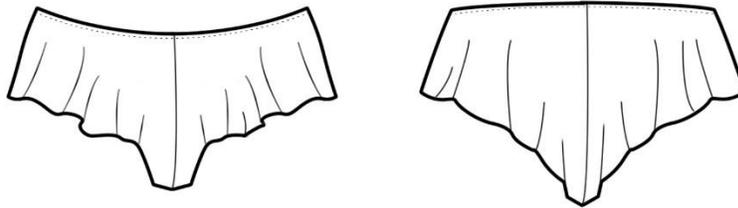

The Alice Flutter Knickers are a loose fitting, 1920's style tap-pant, modernized! They feature a lower waist-line, lined gusset, and fun, fluttery fit.

Suggested Fabrics:

Fabrics with a good drape, such as charmeuse, chiffon, voile, lightweight knits.

Notions:

Fold Over Elastic, Thread, Needles, Lace for Trimming.

	Extra Small	Small	Medium	Large	Extra Large
<i>Fabric</i>	1 yard (0.9m)	1 yard (0.9m)	1 yard (0.9m)	1 1/8 yard (1m)	1 1/8 yard (1m)
<i>Fold over elastic</i>	7/8 yard (0.85m)	7/8 yard (0.85m)	1 yard (0.9m)	1 1/8 yard (1m)	1 1/3 yard (1.25m)
<i>Lace Trim</i>	2 1/4 yards (2m)	2 1/3 yards (2.15m)	2 1/3 yards (2.15m)	2 1/2 yards (2.25m)	2 1/2 yards (2.25m)

	Bust	Waist	Hips
<i>Extra Small</i>	34-35" (86-89cm)	24-25" (61-64cm)	33-34" (84-86cm)
<i>Small</i>	36-37" (91-94cm)	26-27" (66-69cm)	35-36" (89-91cm)
<i>Medium</i>	38-39" (96-99cm)	28-29" (71-74cm)	37-38" (94-97cm)
<i>Large</i>	40-41" (101-104cm)	30-31" (76-79cm)	39-40" (99-102cm)
<i>Extra Large</i>	42-43" (106-109cm)	32-33" (81-84cm)	41-42" (104-107cm)

©Ohhh Lulu 2015. Ohhh Lulu Patterns are for personal use only and are not to be used for commercial production on any scale. Garments made from this pattern cannot be sold as your own design. No Part of this pattern is to be re-sold or reproduced in any format.

1504 Alice Flutter Knickers

Printing & Assembling Your PDF Pattern.

1. For best results, open and print your file using Adobe Reader (available here <https://get.adobe.com/reader/>).
2. Print Pattern on US Letter or A4 Paper (if using A4, select "US Letter" Page Size in your Print Options/Advanced Options). Before you print, make sure you have selected "no scaling" or print "actual Size (Fig.1).

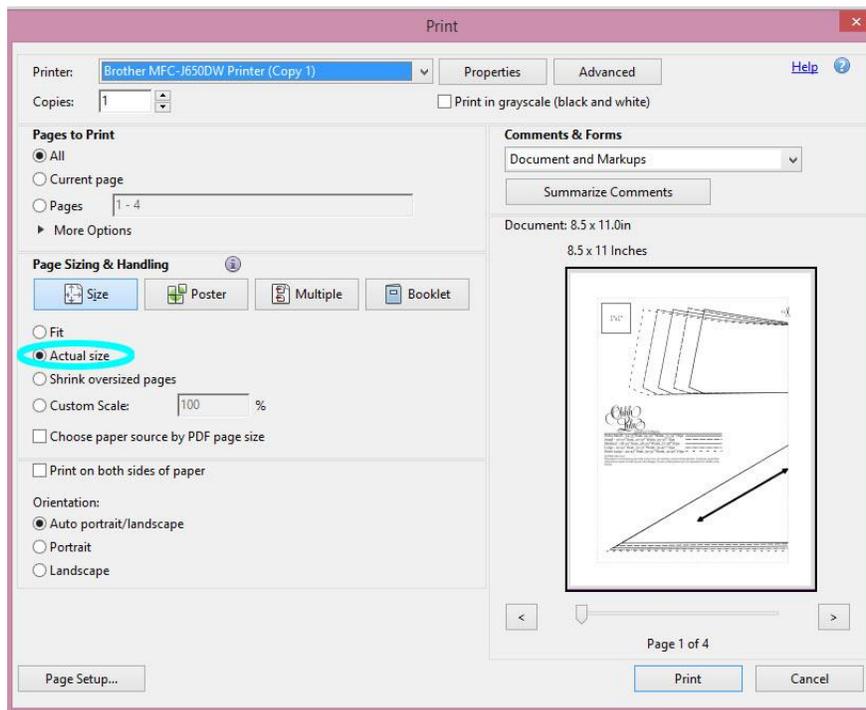


FIGURE 1

3. Trim off the margins that have the scissor symbols and tape pages together using the alphanumeric indicators as a guide (fig. 2).

1504 Alice Flutter Knickers

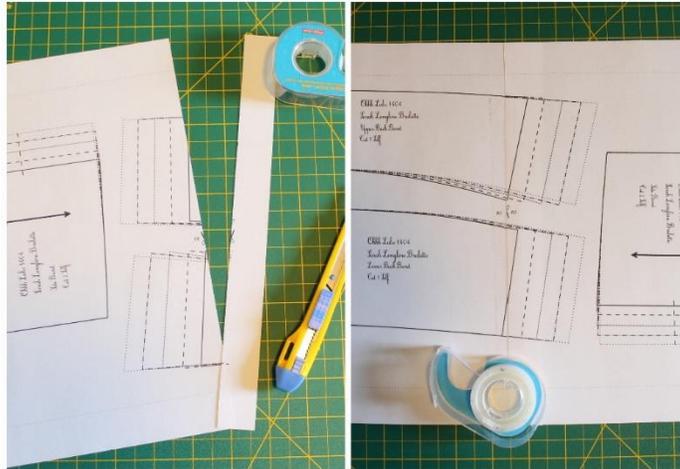


FIGURE 2

4. Cut out the pattern pieces in the size that best corresponds with your measurements.
5. Sew a test garment out of a similar weight and stretch fabric to test your fit. Make any alterations necessary to customize the pattern to your body shape. This is especially important for bras and bodysuits.
6. $\frac{1}{2}$ " Seam Allowances are included unless otherwise indicated. Hem allowance is $\frac{1}{4}$ ".
7. Cut out your fabric using the cutting indicators on the pattern pieces.

Assembly

1. Stitch Front pieces together down crotch seam using a $\frac{1}{2}$ " Seam Allowance. Finish seam with zig-zag or serger (fig.3).



FIGURE 3

1504 Alice Flutter Knickers

2. In the same manner, stitch together back using a ½" Seam Allowance.
3. Attach Front and Back at Crotch Seam (Fig.4).



FIGURE 4

4. Serge or zig-zag along front and back edge of the Gusset Lining (fig.5).



FIGURE 5

1504 Alice Flutter Knickers

5. Baste the gusset lining over the crotch so that the mid-point of the gusset lining meets the crotch seam (fig.6).



FIGURE 6



FIGURE 7

1504 Alice Flutter Knickers

Method 1: Lace Finishing and Side Seams

Use this method if your lace has one straight edge and one decorative edge.

1. With the right side of the lace facing the right side of the garment, attach the lace along the hemline of the knickers using a serger or zig-zag stitch (fig.8).
2. Turn seam allowance under and press.
3. Stitch side seams together using a $\frac{1}{2}$ " Seam Allowance.
4. Top stitch around the hem using a single or twin needle (fig.9).



FIGURE 8



FIGURE 9

1504 Alice Flutter Knickers

Method 2: Lace Finishing and Side Seams

If you are using a trimming lace with two scalloped or decorative edges, you can use this method to preserve both edges.

1. Begin by basting the Lace around the hemline. The wrong side of the lace faces the wrong side of the fabric. The lace should extend beyond the hemline by approximately 1/8". Stitch in from the raw edge of the fabric by 1/8" (fig.10).



FIGURE 10

2. After basting the lace on, turn lace towards the front of the garment and press (fig.11). The raw edge of the hem edge gets hidden between the garment and the lace. Zig-zag stitch the lace in place (fig.12). Remove basting stitches.

1504 Alice Flutter Knickers

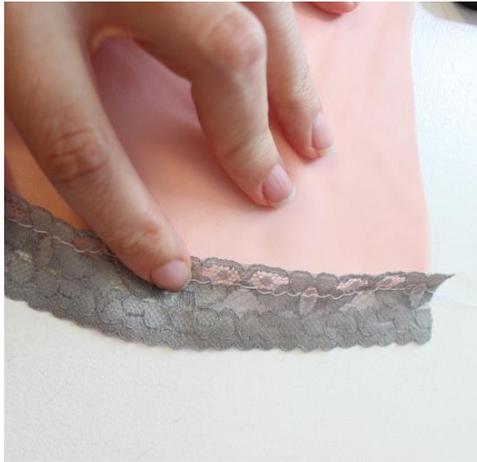


FIGURE 11



FIGURE 12

1504 Alice Flutter Knickers



FIGURE 13

3. Stitch side seams together using a ½" Seam Allowance.

Waist Elastic

1. Cut a length of elastic XS=25.5"/S=27.5"/M=29.5"/L=31.5"/XL=33.5" (OR wrap fold over elastic around high-hips so that it feels as snug as you would like your waistband. Add 1" to that length for seam allowance).
2. Stitch fold over elastic into a loop, using a ½" seam allowance. Trim back seam allowance to about 1/8".
3. Pin elastic evenly around the circumference of the waist opening. Pin elastic onto the wrong side of the fabric.
4. Baste elastic on using a zig-zag stitch (fig.14). Stretch elastic as you zig-zag it on. You'll see the fabric gently gather under the tension of the elastic (fig.15).

1504 Alice Flutter Knickers



FIGURE 14



FIGURE 15

5. Trim back any fabric that extends beyond the fold line of the elastic. Fold elastic in half along fold line and top stitch using a zig-zag stitch.

1504 Alice Flutter Knickers



FIGURE 16



6. Finish with embellishments of your choice!



1504 Alice Flutter Knickers

Glossary

Backtack – anchor the beginning and end of a seam line by stitching both back and forth, before continuing on with your seam.

Baste – secure two pieces in place using a long stitch length. These stitches can later be removed.

Band Elastic – elastic that is sewn around the lower edge (band) of the bra. Usually is plush on one side, and may have a decorative edge. Band Elastic comes in varying widths. Ohhh Lulu Patterns are developed for use with ½" Band Elastic.

Bias – Cutting fabric on the bias allows woven, non-stretch fabrics to provide a small amount of stretch. The bias is 45° to the warp and weft (vertical and horizontal running) threads.

CB – Center Back

CF – Center Front

FOE – Fold over Elastic

Fold over elastic – elastic which binds raw edges, much like a traditional bias-binding, but provides resiliency and stretch.

Grade Seam Allowance – Trimming back your seam allowance in a graduated manner, to reduce bulk.

Picot Elastic – elastic with one looped, or decorative edge. Often used around necklines or panty legs.

Right Side – refers to the front side of the fabric (in the case of a print, right side refers to the printed side of fabric. In the case of a weave, like satin, right side refers to the shiny side of the fabric)

SA – Seam Allowance

Sliders – plastic or metal findings for assembling adjustable lingerie straps.

Strap Elastic – comes in a variety of sizes ¼" – 1", is usually plush on one side, and offers a small amount of stretch. Strap elastic can be substituted with sewn strips of fabric to match your garment.

Wrong side – refers to the back side of the fabric.

Resources

How to Videos <https://www.youtube.com/c/OhhhLulu>

Pattern Hack's and Tutorials <http://www.ohhhLulu.com/p/how-tos.html>

1"x1"

A1 

Ohhh Lulu

Sewing Patterns

Extra Small - 34-35" Bust, 24-25" Waist, 33-34" Hips	—————
Small - 36-37" Bust, 26-27" Waist, 35-36" Hips	- - - - -
Medium - 38-39" Bust, 28-29" Waist, 37-38" Hips	—————
Large - 40-41" Bust, 30-31" Waist, 39-40" Hips	- - - - -
Extra Large - 42-43" Bust, 32-33" Waist, 41-42" Hips	- - - - -

©Ohhh Lulu, 2015.
This pattern is for personal use only and is not to be used for commercial production. Garments made from this pattern cannot be sold as your own designs. No part of this pattern is to be reproduced or resold in any format.

**1/2" Seam Allowance included


**1/4" Hem Allowance

CF


B1 

A1

A2

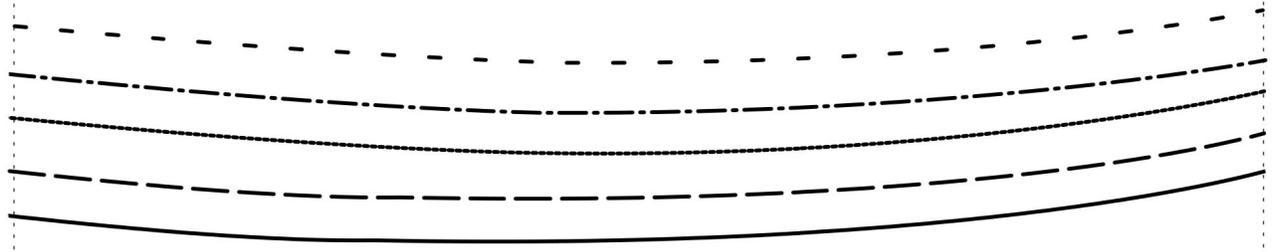


Ohhh Lulu 1504
Alice Flutter Knickers
Front
Cut 2 Self

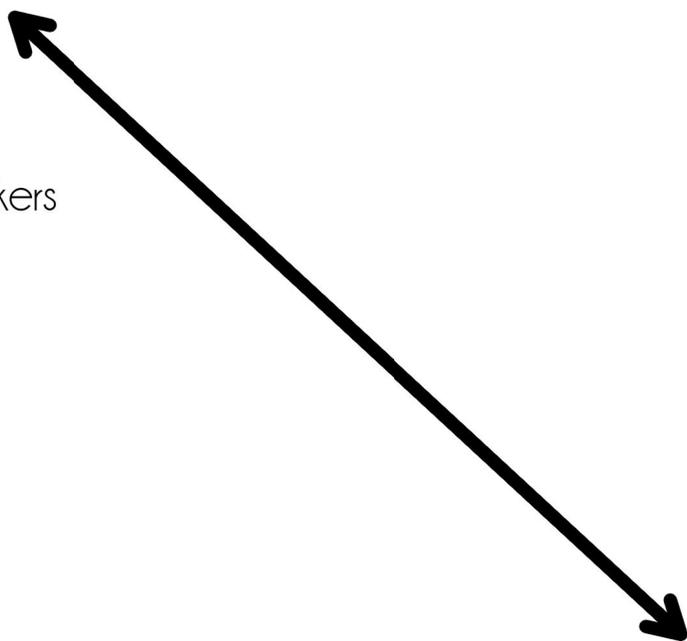

B2



A2

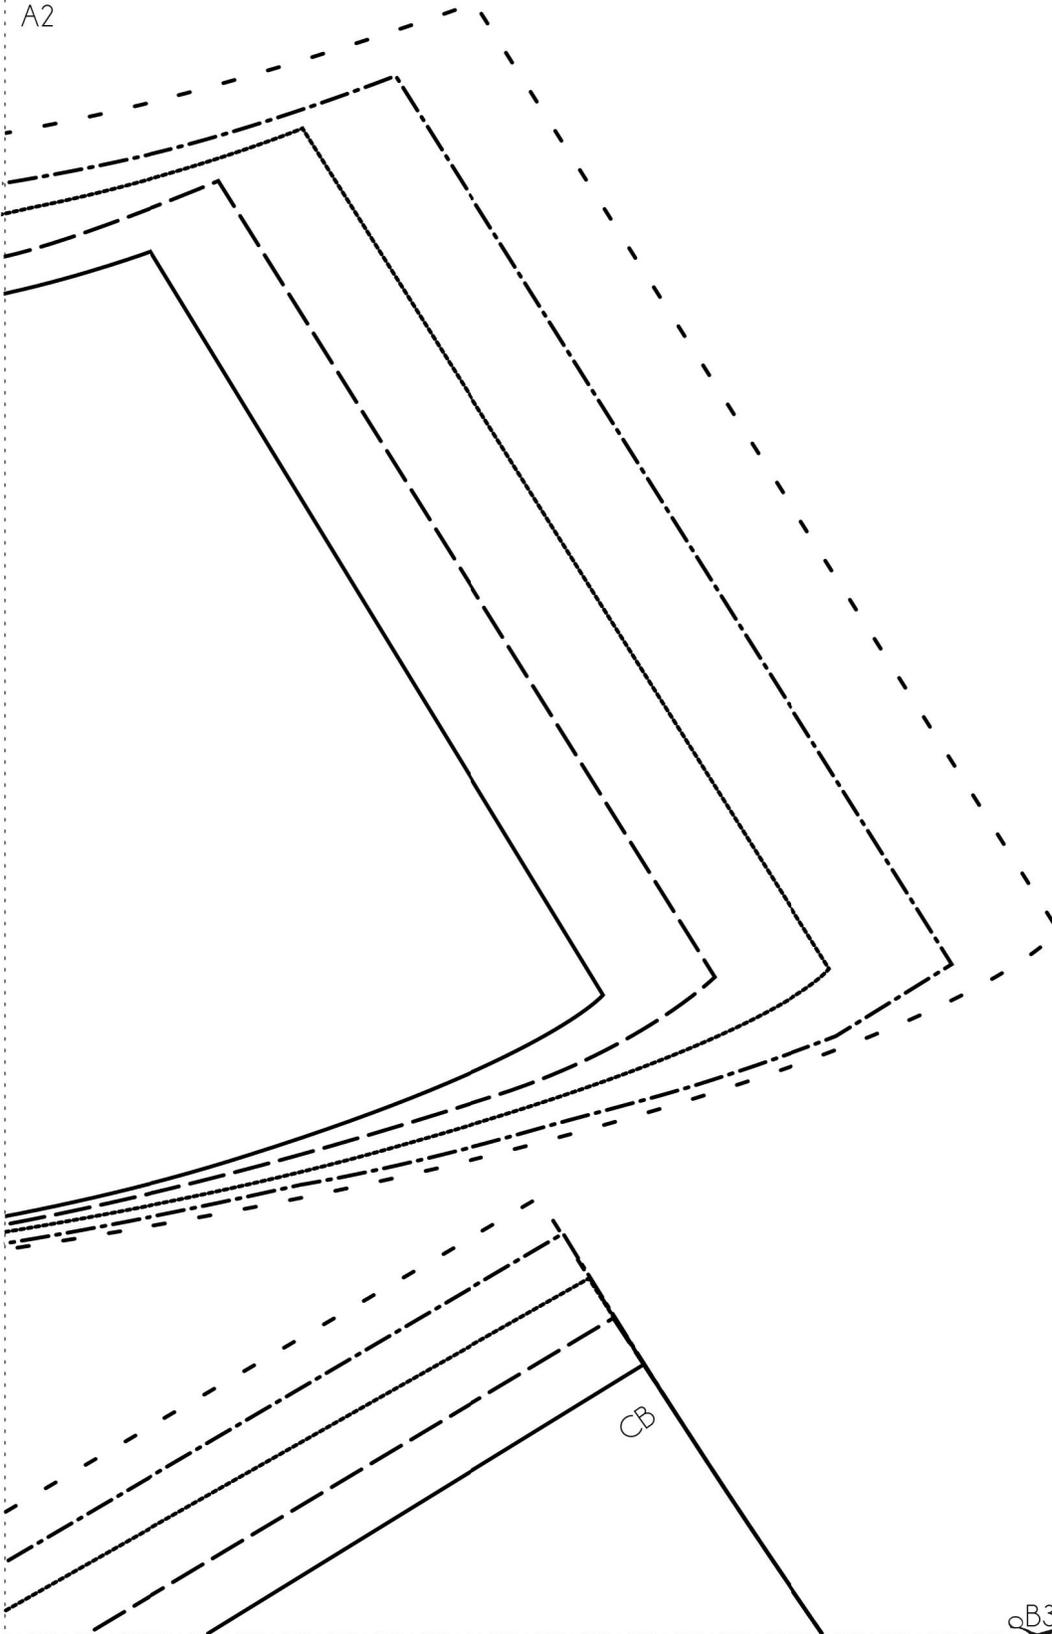



A3

CB

B3

A3

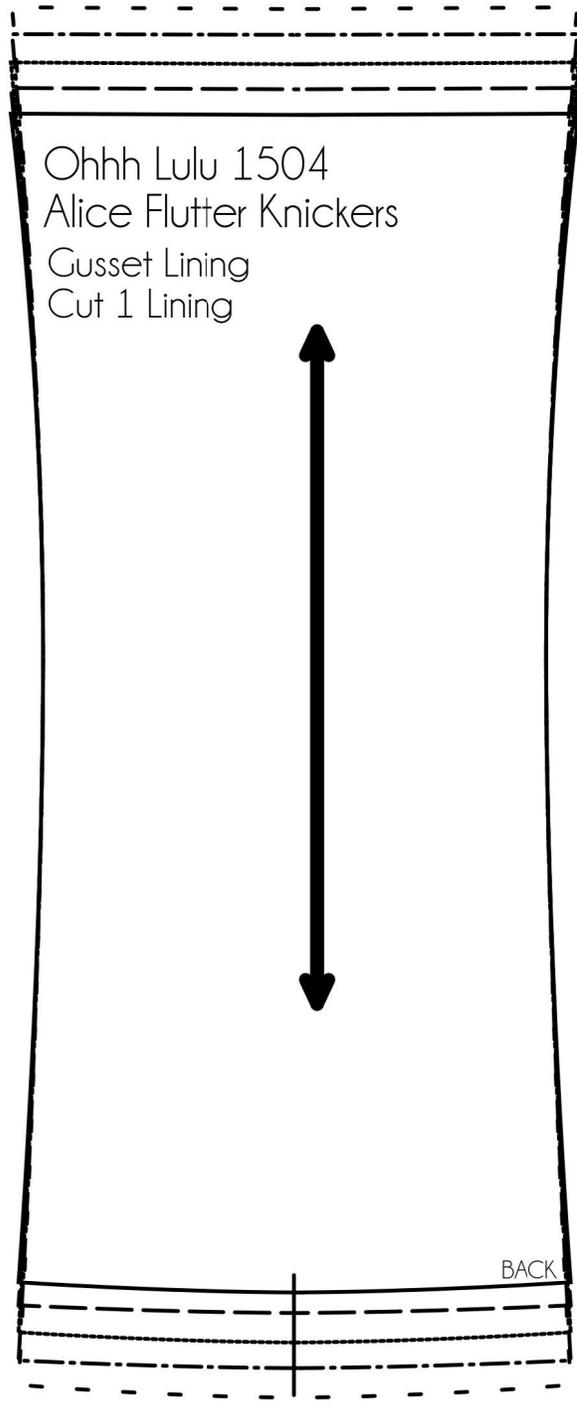


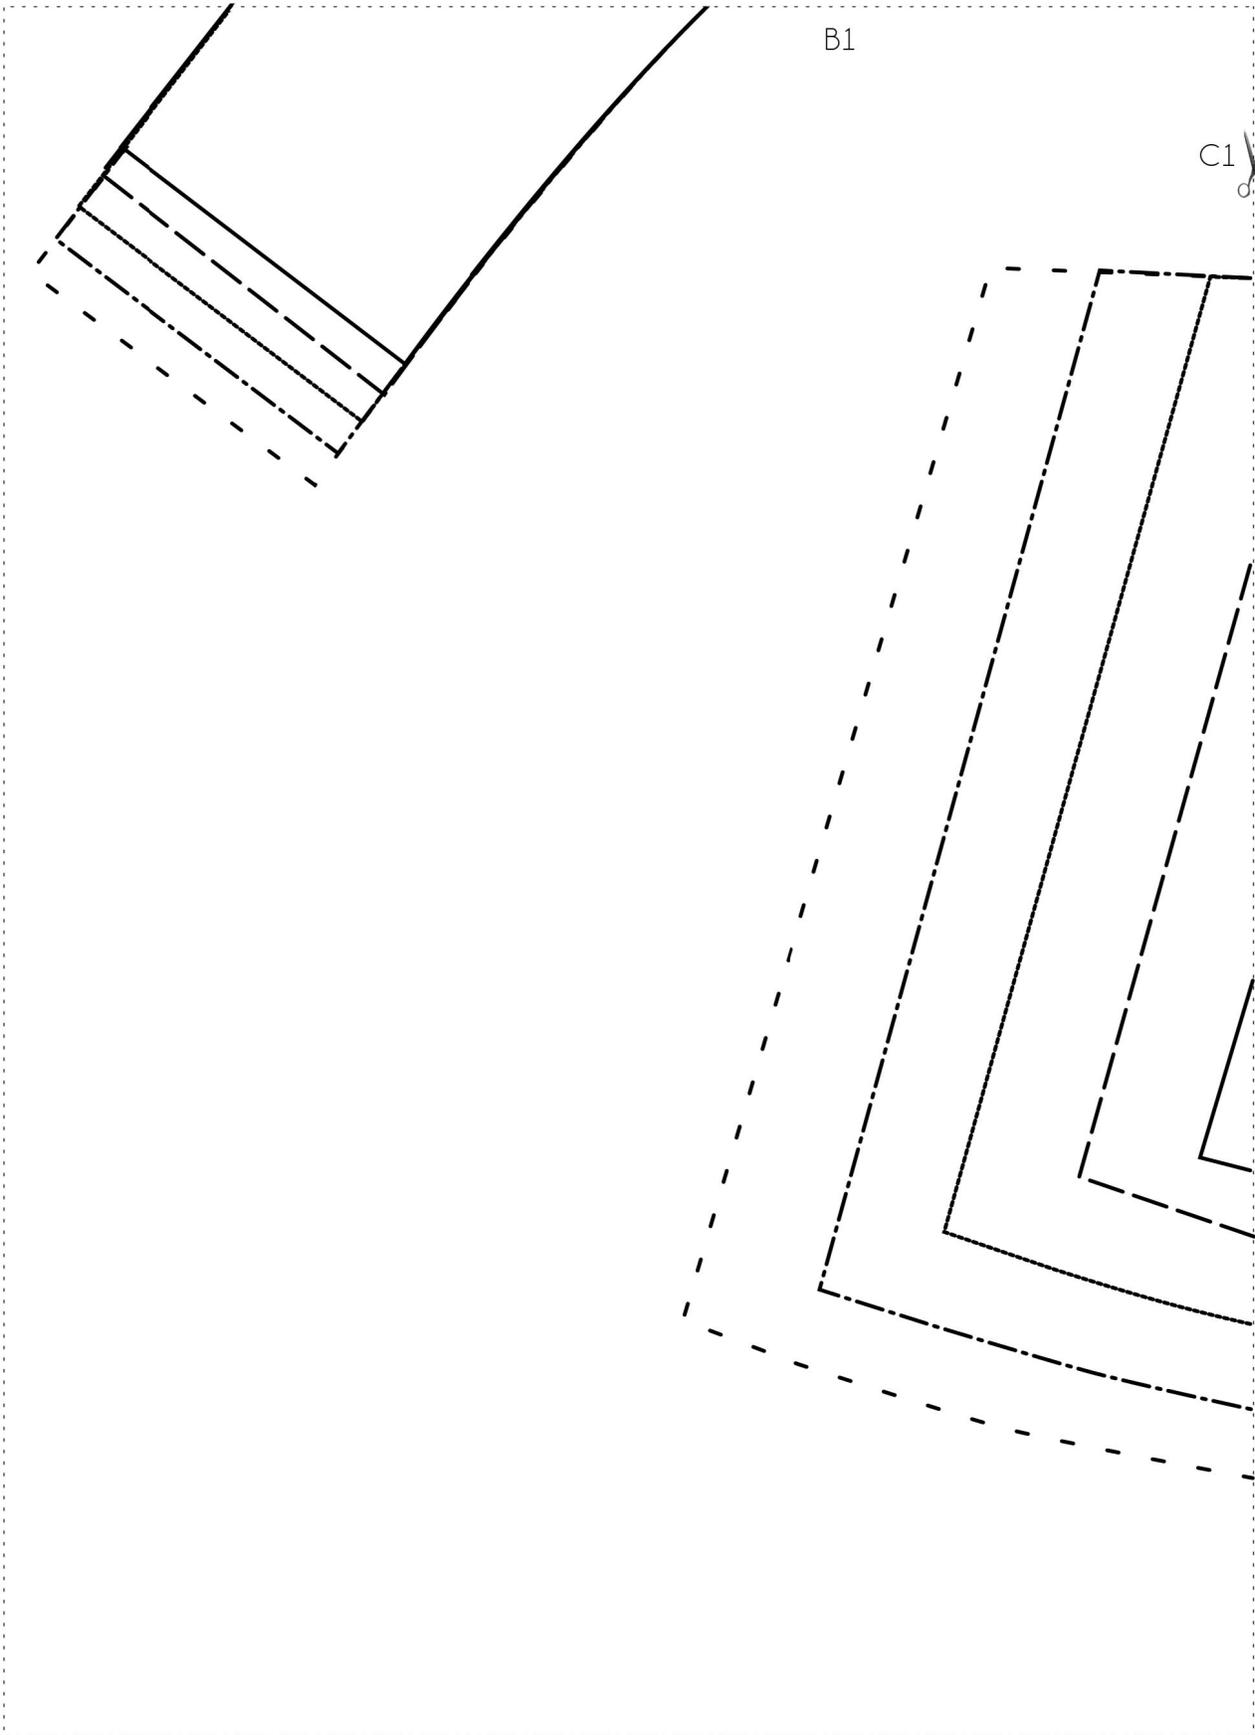

B1

C1



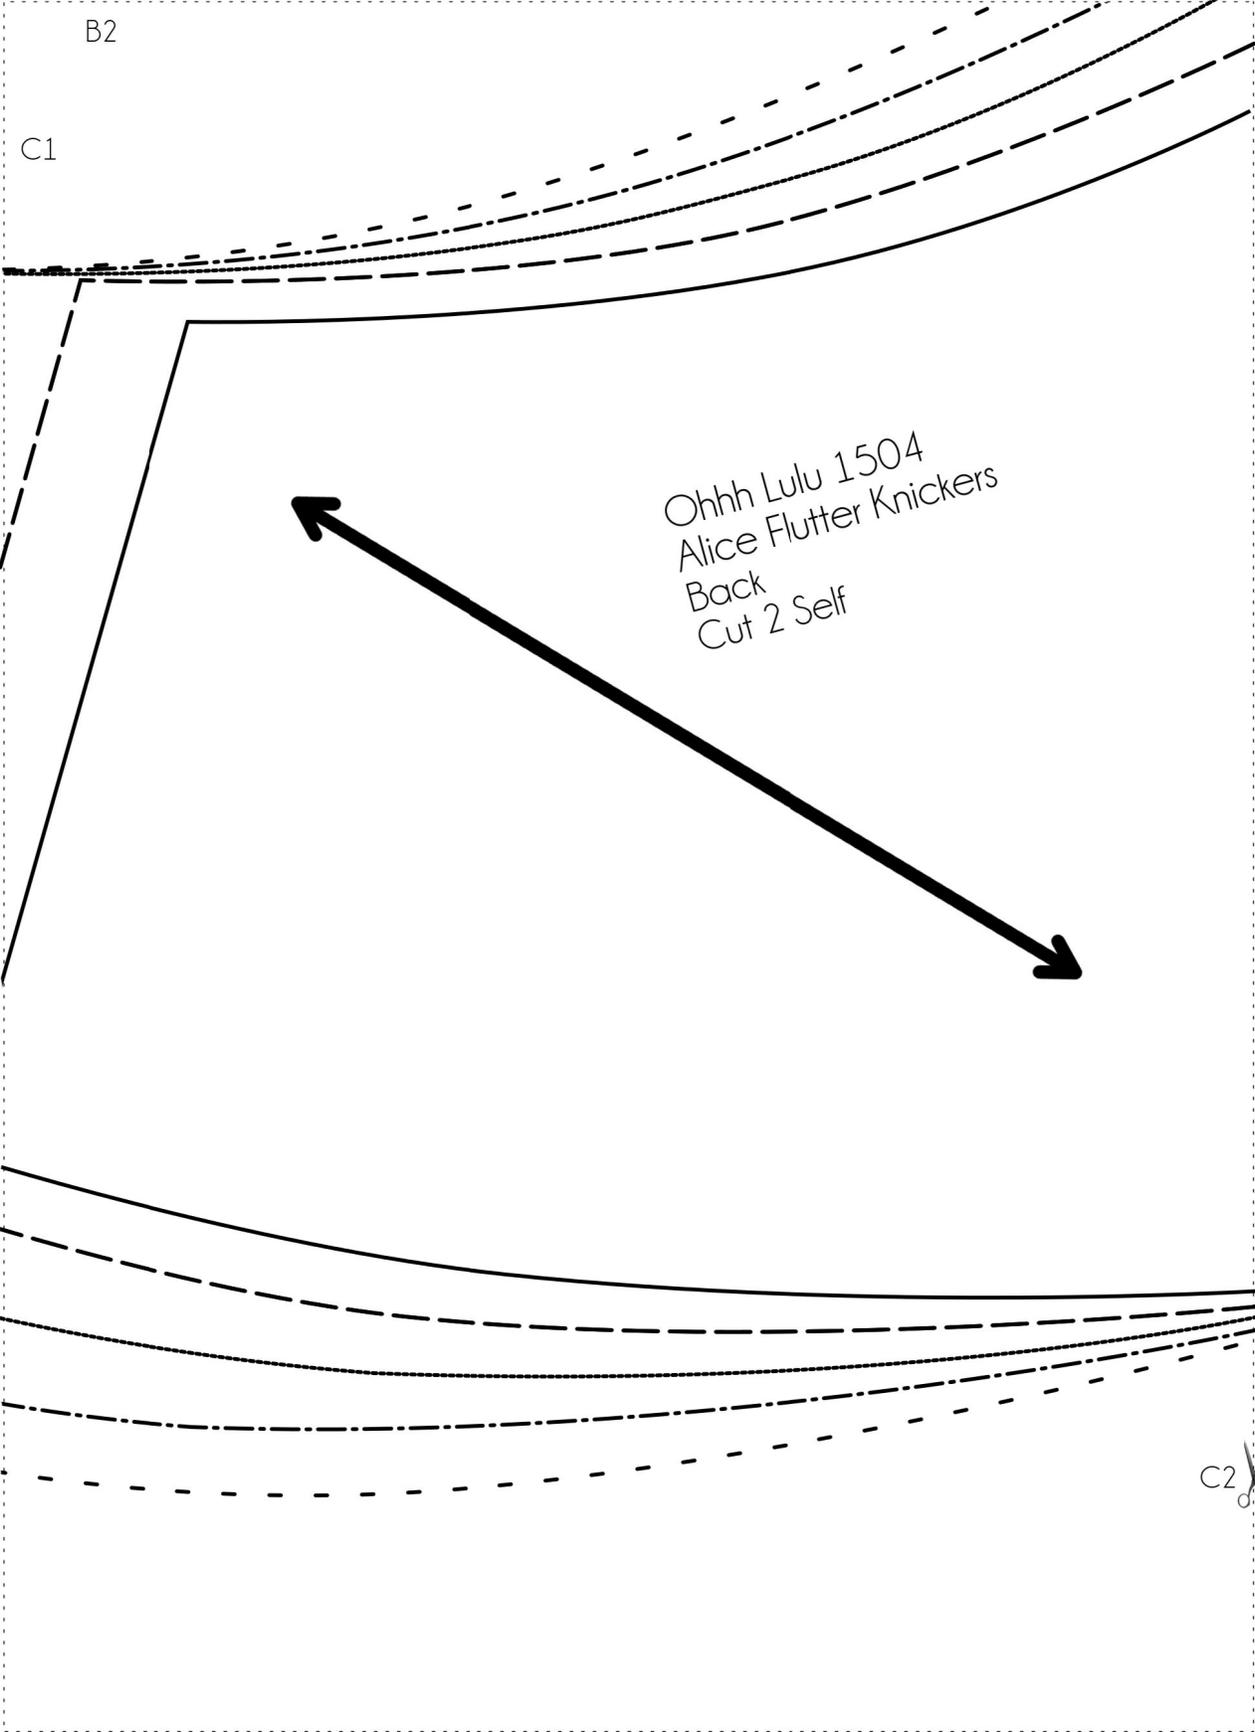


B2

C1

Ohhh Lulu 1504
Alice Flutter Knickers
Back
Cut 2 Self

C2



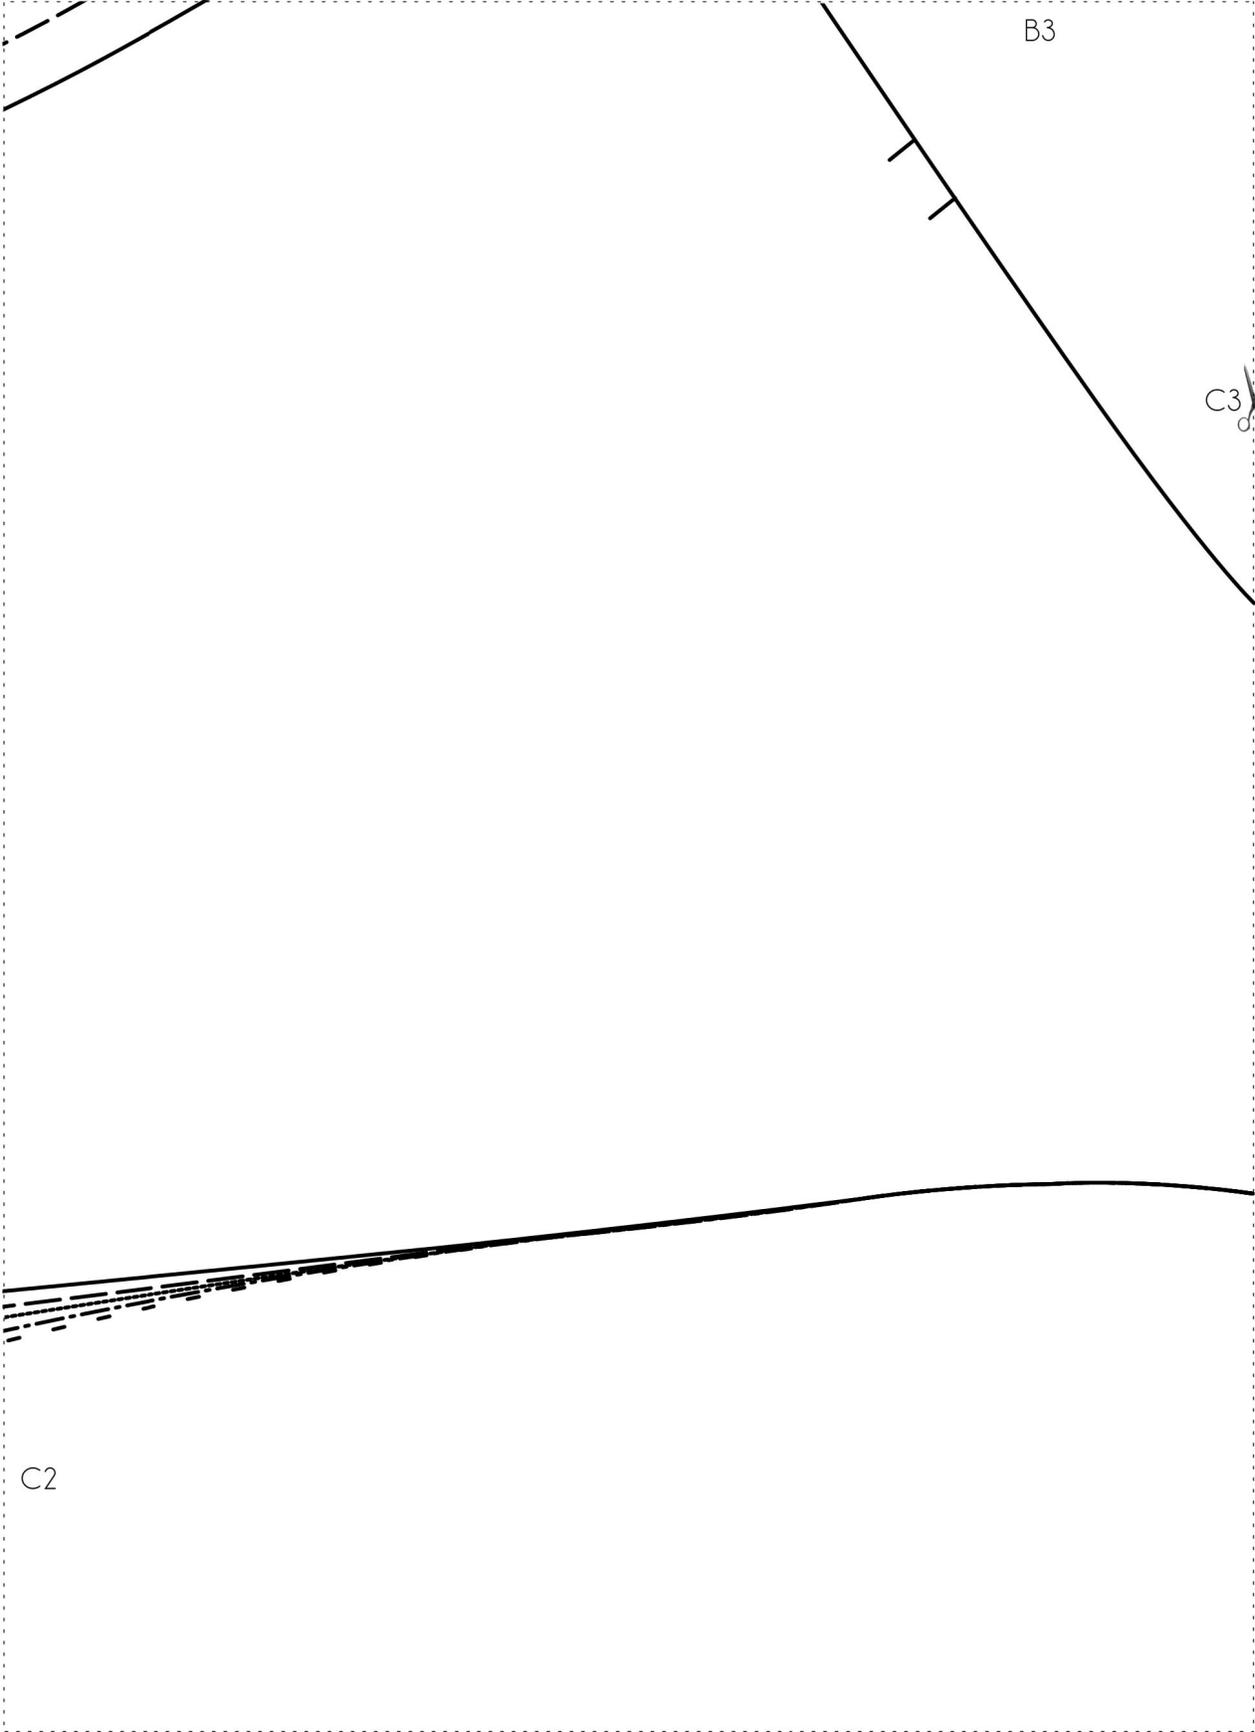

B3

C3



C2

C3

